

UPDATE ON SIGNAL PROCESSING UPGRADES FOR THE NATIONAL WEATHER RADAR TESTBED PHASED-ARRAY RADAR

Sebastián Torres, Ric Adams, Christopher Curtis, Eddie Forren, Igor Ivić,
David Priegnitz, John Thompson, and David Warde

Cooperative Institute for Mesoscale Meteorological Studies, The University of Oklahoma and
NOAA/OAR National Severe Storms Laboratory
Norman, Oklahoma

1. INTRODUCTION

The National Weather Radar Testbed Phased-Array Radar (NWRT PAR) located in Norman, OK was established to demonstrate the potential to simultaneously perform aircraft tracking, wind profiling, and weather surveillance as a multifunction phased-array radar (MPAR). Since its inception, the system has undergone an extensive engineering evaluation and numerous hardware and software upgrades. Since 2007, a team of scientists, engineers, and software developers at the National Severe Storms Laboratory has been working on enhancing the real-time signal processing functionality of the NWRT PAR to bring it up to operational weather radar standards (such as those in the NEXRAD network) and to demonstrate new capabilities. This development is based on a modern and improved multi-processor/multi-computer signal processing environment which allows the implementation of both traditional and innovative real-time signal processing techniques. These include schemes to effectively remove clutter contamination from meteorological signals, methods to mitigate range and velocity ambiguities, and techniques that allow for faster data collection.

This paper reports on the latest improvements to the NWRT PAR. These include hardware and software upgrades as well as the implementation of advanced signal processing techniques such as range oversampling and the ability to perform adaptive scanning by exploiting electronic beam steering. Finally, we present a roadmap for software upgrades that will provide researchers and users with an optimum platform for demonstrating and evaluating the MPAR concept.

2. THE NWRT PAR

The NWRT PAR is an S-band (9.38 cm), agile-beam, PAR system (Zrnić et al. 2007). In a nutshell, the NWRT PAR exploits a passive, 4352-element phased-array antenna to provide stationary, two-dimensional electronic scanning of weather echoes within a given 90° azimuthal sector. The antenna is mounted on a pedestal so that the best orientation can be selected prior to any data collection. The antenna beamwidth is 1.5° at boresite (i.e., perpendicular to the array plane)

and gradually increases to 2.1° at ±45° from boresite. The peak transmitted power is 750 kW and the range resolution provided by this system is 240 m. In some aspects, such as beamwidth and sensitivity, the NWRT PAR is inferior compared to operational radars such as the Weather Surveillance Radar-1988 Doppler (WSR-88D). However, the purpose of this system is not to achieve operational-like performance or to serve as a prototype for the MPAR, but to demonstrate the operational utility of some of the unique capabilities offered by PAR technology that may eventually drive the design of future operational weather radars.

Significant hardware and software upgrades have been and are needed to support the NWRT mission as a demonstrator system for the MPAR concept. Since 2007, scientists and engineers at NSSL have been improving the functionality and capabilities of the NWRT PAR. These upgrades are summarized next.

3. NWRT PAR HARDWARE UPGRADES

Soon after deployment of the NWRT PAR, it became apparent that proposed increasing needs for computational power and archiving of time-series and meteorological data were unsustainable with the original signal processing hardware. Accordingly, the radar signal processor was upgraded from a discontinued, proprietary cluster of multiprocessor boards manufactured by SKY Computers, Inc. to a Linux-based cluster of four dual-processor, dual-core nodes that communicate via a high-speed interconnect (Forsyth et al. 2007). The architecture of the new signal processor is based on distributed computing. That is, all nodes in the cluster work toward the common goal of real-time radar signal processing. The system is designed to optimally utilize the nodes (i.e., computational resources). Specifically, a load-balancing mechanism, in which nodes compete to read and process sets of radar data, tailors the data distribution to each node at a rate according to their capabilities. In this way, the system's scalability is facilitated by allowing a hybrid mixture of nodes in the cluster. The signal processor cluster is complemented by a 12-TB redundant storage system (RAID) that supports simultaneous, continuous recording of time-series and meteorological data for about 175 hours.

In addition to the in-house projects described above, we are collaborating with our university and private-industry partners on two other hardware upgrade projects. In partnership with the University of Oklahoma, a multi-channel digital receiver is currently being

Corresponding *author address*: Sebastian M. Torres, NSSL, 120 David L. Boren Blvd., Norman, OK 73072; email: Sebastian.Torres@noaa.gov

integrated with the NWRT PAR. This will allow access to additional antenna ports (Yeary et al. 2010). Sum and difference channels will be used to demonstrate both advanced aircraft tracking techniques and the spaced-antenna interferometry technique to measure cross-beam winds (Zhang and Doviak 2009). Additional auxiliary channels will be used to demonstrate spatial filtering techniques for clutter mitigation (Le et al. 2009).

Research continues to define a dual-polarized sub-array for demonstrating the feasibility and performance of phased-array dual polarization measurements in the context of weather observations (Forsyth et al. 2009). Several studies were completed by Basic Commerce Industries concerning radome effects, antenna pattern, calibration issues, and the design of the radiating elements to meet the cross-polarization isolation requirement of 30dB (Staiman 2009).

4. NWRT PAR SOFTWARE UPGRADES

The deployment of the new signal processing hardware marked the beginning of a series of software upgrades. Using a path of continuous upgrades with an average of two releases every year, we have been gradually incorporating new and improved functionality to the NWRT PAR. The need for software and signal processing improvements is twofold. On one hand, it is desirable that the NWRT PAR produces operational-like data with quality comparable to that of the WSR-88D. High data quality leads to better data interpretation and is conducive to the development of automatic algorithms. On the other hand, improvements are needed to demonstrate new capabilities, some of which are applicable to conventional and phased-array radars, and some that are unique or better suited to PAR technology. For example, the use of adaptive scanning strategies to perform focused observations of the atmosphere is not unique to PAR, but update times can be greatly reduced by using PAR's electronic beam steering capabilities as opposed to having the mechanical inertia inherent to reflector antennas.

4.1. Infrastructure Upgrades

The software infrastructure was drastically revamped to support the implementation of new functionality in three major areas: the distributed computing environment, the user interface, and the real-time controller. The message-based, signal-processing-cluster infrastructure was modeled after the NEXRAD Open Radar Product Generation design (Jain et al. 1997). This type of design allows for seamless integration of nodes in the cluster, and provides the required computational power to implement traditional as well as advanced signal processing techniques.

The radar control interface (RCI) is a Java-based graphical user interface that provides radar control and status monitoring. The standard RCI functionality allows radar operators to complete tasks such as moving the antenna pedestal, selecting scanning strategies, turning the radar on and off, and controlling data archiving. In addition to these and many other basic control

functions, the RCI has been significantly improved to demonstrate new capabilities (Priegnitz et al. 2009). For example, the system allows radar operators to dynamically select a sequence of scanning strategies and modify any of their parameters in real time. The dynamic selection of scanning characteristics is being evaluated as a manual capability, but will eventually lead to the design of new, advanced adaptive scanning algorithms. At the same time, the RCI provides a means to assess the performance of existing adaptive scanning algorithms in real time by providing a graphical display of active and inactive beam positions (Fig. 2; the current adaptive algorithm is described in section 5).

The real-time controller (RTC) is the nexus with the rest of the radar hardware. The RTC provides control of antenna positioning, the transmitter, and the receiver. RTC updates support multi-function capabilities by tagging received signals for function-specific processing. Also, the RTC receives commands from the signal processor to perform adaptive scanning by turning on and off selected beam positions. In spring 2010, we plan to support schedule-based scanning by removing the scan processing functionality from the RTC and providing scan information directly from the signal processor. This will allow better real-time control of scanning strategies driven by an automatic scheduling algorithm (e.g., Reinoso-Rondinel et al. 2010) and will therefore enable more advanced adaptive scanning schemes.

Improvements to the archiving function were also needed to support the recording and playback capabilities vital in a research and development environment. The playback function is routinely used to evaluate the performance of signal processing techniques and fine-tune algorithm parameters. Also, because the system is in constant evolution, playback is often used to reprocess time-series data with the latest capabilities and obtain the best possible quality of the meteorological data. Moreover, the recording and playback functions are key components of the yearly spring experiments conducted at the NWRT (Heinselman et al. 2009) as they allow participants to work "on demand" with a diverse set of weather situations from our archive.

4.2. Signal Processing Upgrades

Signal processing enhancements are a fundamental part of the NWRT PAR upgrades with both traditional and advanced signal processing techniques being implemented and tested in a pseudo-operational environment. Traditional signal processing techniques are exploited to achieve performance similar to that of WSR-88D radars. This facilitates data analyses and comparisons with existing operational data. Additionally, we are able to transition our latest research into a radar system through the implementation of advanced signal processing techniques.

To support the evolutionary nature of the signal processing capabilities on the NWRT PAR, we designed a flexible and expandable architecture based on "processing modes." Each processing mode ingests

time-series data (i.e., in-phase and quadrature phase samples) and produces spectral moment data (i.e., reflectivity, Doppler velocity, and spectrum width) in fundamentally different ways. To date, the system supports five processing modes; three modes operate in the time domain and two in the frequency domain. Processing modes are data-driven signal processing pipelines (i.e., sequences of processing blocks) that can be controlled with a set of “processing options.” These are user-defined, editable control flags and parameters for the processing blocks that compose a processing mode.

Signal processing techniques address needs in four major areas: calibration, artifact removal, range-and-velocity ambiguity mitigation, and data accuracy. As of December 2009, the system runs a few automatic calibration routines such as noise power and direct-current (DC) bias measurements. Time-series data are filtered to mitigate contamination from radio-frequency interference, strong point targets such as airplanes, and stationary returns from the ground such as buildings or trees. Ground clutter detection and filtering is done automatically in real time. Detection is based on the autocorrelation spectral density and the filter’s suppression is adjusted based on the strength of the contamination (Warde and Torres 2009). This mitigation technique, referred to as CLEAN-AP, has been shown to exceed the performance of standard operational methods (Warde and Torres 2010). To mitigate range and velocity ambiguities (Doviak and Zrnić 1993) the signal processor can ingest multiple-pulse-repetition-time (PRT) data such as “batch” or staggered PRT (Torres et al. 2004) and can perform range unfolding or velocity dealiasing, respectively. In addition, accuracy of meteorological data can be improved by using range oversampling techniques (Torres and Zrnić 2003, Curtis and Torres 2010) or beam multiplexing (Yu et al. 2007). Typically, signal detection (a.k.a. censoring) in operational weather radars is performed using thresholds on estimated signal-to-noise ratio and/or magnitude of the autocorrelation coefficient. The NWRT PAR uses a novel approach based on coherency that leads to increased detection rates in the areas of weak reflectivity (Ivić and Torres 2009).

In upcoming upgrades, we plan to implement adaptive range oversampling, improved spectral moment estimators, additional automatic calibration routines, and advanced spectral processing techniques for improved data quality.

5. ADAPTS: ADAPTIVE DIGITAL SIGNAL PROCESSING ALGORITHM FOR PAR TIMELY SCANS

ADAPTS is a proof-of-concept implementation of spatially targeted adaptive scanning for the electronically steered NWRT PAR. Preliminary evaluations of ADAPTS have shown that the performance improvement with electronic adaptive scanning can be significant compared to conventional scanning strategies, especially when observing isolated storms (Heinselman and Torres 2010). ADAPTS works

by turning “on” or “off” individual beam positions within a scanning strategy based on three criteria. If one or more criteria are met, the beam position is declared active. Otherwise, the beam position is declared inactive. Active beam position settings are applied and become valid on the next execution of a given scanning strategy. Additionally, ADAPTS periodically completes a complete volumetric surveillance scan, which is used to re-determine where weather echoes are located. A user-defined parameter controls the time between full scans (by default this is set at 5 min). Following a surveillance scan, data collection continues only on the active beam positions.

A beam position becomes active if one or more of the following criteria are met: (1) reflectivities on gates along the beam meet continuity, coverage, and significance conditions; (2) the elevation angle is below a predefined level; or (3) a neighboring beam position is active based on the first two criteria. The first criterion uses continuity, coverage, and significance conditions to make a quantitative determination of the amount of significant weather returns at each beam position (Fig. 1). In this context, a beam position is active if it contains: (a) a minimum number of consecutive range gates (by default 4) with reflectivities exceeding a threshold (by default 10 dBZ), and (b) a minimum total areal coverage (by default 1 km²) with reflectivities exceeding the same threshold. The second criterion provides data collection at all beam positions for the lowest elevation angles to monitor low-altitude developments. A user-defined elevation threshold (2.5° by default) controls the lowest elevation angle where ADAPTS may begin to inactivate beam positions. The third criterion uses “neighboring” beam positions to expand the data collection footprint to allow for continuous adaptation in response to storm advection, growth, or decay (Fig. 1). Nevertheless, new developments at midlevels may not be immediately sensed since additions to the list of active beam positions may be delayed until the next complete volume scan. Neighboring beam positions are defined as those immediately above and below in elevation and two on either side in azimuth of an active beam position (i.e., there are a total of 6 neighbors for each beam position, unless the scanning domain boundaries are approached). Even if no beam positions are defined active above the user-defined elevation threshold (criterion 2), ADAPTS will activate all beam positions at the tilt directly above the elevation threshold based on the neighboring criterion.

At the time of this writing, ADAPTS only works with scanning strategies that have a specific structure. ADAPTS assumes that there is only one PPI scanning strategy that repeats continuously. The algorithm also expects that all tilts are ordered in ascending elevation order, and use the same azimuth beam positions with a minimum azimuthal spacing of 0.5° (i.e., the maximum number of beam positions in an elevation is 180). These limitations will be removed with the next upgrade cycle scheduled for the spring of 2010.

Users at the RCI can monitor the performance of ADAPTS by looking at a graphical display of active beam positions (Fig. 2). Beam positions are color-coded

as follows: white beam positions are inactive, green and yellow beam positions are active. Green beam positions meet the first and second detection criterion, whereas yellow beam positions correspond to the “neighboring” footprint extension (third criterion). The display updates every second and highlights in red the “current” beam position.

6. CONCLUSIONS

Under the umbrella of the multifunction phased-array radar (MPAR) initiative, scientists at the National Severe Storms Laboratory have been demonstrating unique PAR capabilities for weather observations in a multifunction environment. This paper described the hardware and software upgrades required to fulfill the NWRP PAR’s mission as a demonstrator system for the MPAR concept.

Through these continuous upgrades we have been demonstrating that PAR technology can be exploited to achieve performance levels that are unfeasible with current operational technology. Nonetheless, more research is needed to translate these improvements into concrete, measurable, and meaningful service improvements for the National Weather Service. As such, the NWRP PAR will continue to explore and demonstrate new capabilities to address 21st century weather forecast and warning needs.

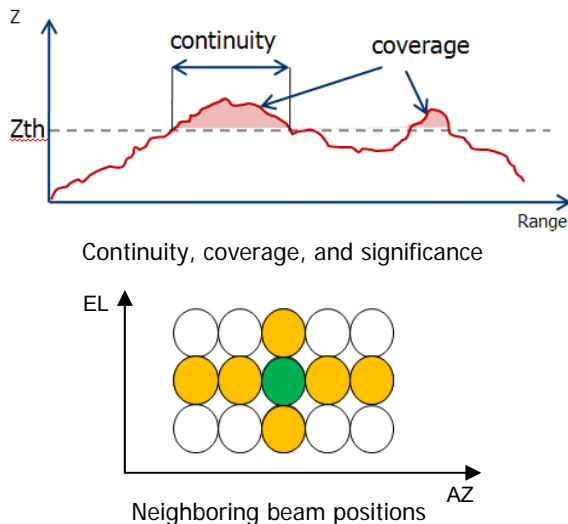


Fig. 1. Second and third criteria for active beam determination in ADAPTS. (top) Depiction of continuity, coverage, and significance conditions based on a range profile of reflectivity. (bottom) Depiction of neighboring beam positions (orange) for an active beam position based on first and/or second criteria (green).

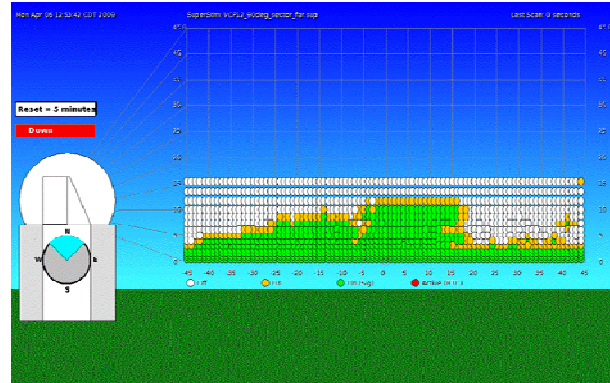


Fig. 2. Depiction of ADAPTS’ real-time performance at the NWRP PAR user interface. Beam positions on an azimuth-by-elevation plane are color-coded as follows: white beam positions are inactive, green beam positions are active based on elevation and coverage criteria, and orange beam positions are active based on the neighborhood criterion.

ACKNOWLEDGMENT

This conference paper was prepared with funding provided by NOAA/Office of Oceanic and Atmospheric Research under NOAA-University of Oklahoma Cooperative Agreement #NA17RJ1227, U.S. Department of Commerce. The statements, findings, conclusions, and recommendations are those of the author(s) and do not necessarily reflect the views of NOAA or the U.S. Department of Commerce.

REFERENCES

- Curtis, C. D., and S. M. Torres, 2010: Range oversampling techniques on the National Weather Radar Testbed. Preprints, 26th International Conference on Interactive Information and Processing Systems (IIPS) for Meteorology, Oceanography, and Hydrology, Atlanta, GA, Amer. Meteor. Soc., Paper 15B.3.
- Doviak, R., and D. Zrnić, 1993: *Doppler Radar and Weather Observations*. Academic Press, 576 pp.
- Forsyth, D. E., J. F. Kimpel, D. S. Zrnic, R. Ferek, J. F. Heimmer, T. McNellis, J. E. Crain, A. M. Shapiro, R. J. Vogt and W. Benner, 2007: Update on the National Weather Radar Testbed (Phased-Array). Preprints, 33rd Conference on Radar Meteorology, Cairns, Australia, Amer. Meteor. Soc., Paper 7.2.
- Forsyth, D. E., J. F. Kimpel, D. S. Zrnic, R. Ferek, J. Heimmer, T. J. McNellis, J. E. Crain, A. M. Shapiro, R. J. Vogt, and W. Benner, 2009: The National Weather Radar Testbed (Phased-Array) – a progress report. Preprints, 25th International Conference on Interactive Information and Processing Systems (IIPS) for Meteorology, Oceanography, and Hydrology, Phoenix, AZ, Amer. Meteor. Soc., Paper 8B.2.

- Heinselman, P. L., D. L. Priegnitz, K. L. Manross, T. M. Smith, and R. W. Adams, 2008: Rapid sampling of severe storms by the National Weather Radar Testbed Phased Array Radar. *Wea. Forecasting*, **23**, 808 – 824.
- Heinselman, P. L., S. M. Torres, R. Adams, C. D. Curtis, E. Forren, I. R. Ivic, D. Priegnitz, J. Thompson, and D. A. Warde, 2009: Phased array radar innovative sensing experiment. Preprints, 34th Conf. on Radar Meteorology, Williamsburg, VA, Amer. Meteor. Soc., P6.5A.
- Heinselman, P. L., and S. M. Torres, 2010: Exploiting NWRTPAR capabilities to improve temporal data resolution. Preprints, 26th International Conference on Interactive Information and Processing Systems (IIPS) for Meteorology, Oceanography, and Hydrology, Atlanta, GA, Amer. Meteor. Soc., Paper 15B.2.
- Ivić, I., and S. Torres, 2009: Using signal coherency to improve detection on weather radars. 34th International Conference on Radar Meteorology, Williamsburg, VA. Amer. Meteor. Soc., Paper P5.8.
- Jain, M., Z. Jing, A. Zahrai, A. Dodson, H. Burcham, D. Priegnitz, and S. Smith, 1997: "Software Architecture of the Nexrad Open Systems Radar Product Generator (RPG)". Preprints, 13th International Conference on IIPS for Meteorology, Oceanography, and Hydrology, Long Beach, CA, Amer. Meteor. Soc., 238-241.
- Le, K. D., R. Palmer, B. Cheong, T. Yu, G. Zhang, and S. Torres, 2009: On the use of auxiliary receive channels for clutter mitigation with phased array weather radars. *IEEE Trans. Geosci. Remote Sens.*, **47**, 272-284.
- Priegnitz, D., P. Heinselman, S. Torres, and R. Adams, 2009: Improvements to the National Weather Radar Testbed radar control interface. 34th International Conference on Radar Meteorology, Williamsburg, VA. Amer. Meteor. Soc., Paper P10.10.
- Reinoso-Rondinel, R., S. M. Torres, and T. Yu, 2010: Task prioritization on phased-array radar scheduler for adaptive weather sensing. Preprints, 26th International Conference on Interactive Information and Processing Systems (IIPS) for Meteorology, Oceanography, and Hydrology, Atlanta, GA, Amer. Meteor. Soc., Paper 14B.6.
- Staiman, D., 2009, Calibration of polarimetric phased array radar for improved measurement accuracy, Preprints, 25th International Conference on Interactive Information and Processing Systems (IIPS) for Meteorology, Oceanography, and Hydrology, Phoenix, AZ, Amer. Meteor. Soc., Paper 9B.2.
- Torres, S., and D. Zrnić, 2003: Whitening in range to improve weather radar spectral moment estimates. Part I: Formulation and simulation. *J. Atmos. Oceanic Technol.*, **20**, 1433-1448.
- Torres, S., Y. Dubel, and D. Zrnić, 2004: Design, implementation, and demonstration of a staggered PRT algorithm for the WSR-88D. *J. Atmos. Oceanic Technol.*, **21**, 1389-1399.
- Warde, D., and S. Torres, 2009: Automatic detection and removal of ground clutter contamination on weather radars. 34th International Conference on Radar Meteorology, Williamsburg, VA. Amer. Meteor. Soc., Paper P10.11.
- Warde, D. A., and S. M. Torres, 2010: A novel ground-clutter-contamination mitigation solution for the NEXRAD network: the CLEAN-AP filter. Preprints, 26th International Conference on Interactive Information and Processing Systems (IIPS) for Meteorology, Oceanography, and Hydrology, Atlanta, GA, Amer. Meteor. Soc., Paper 8.6.
- Yeary, M., J. E. Crain, A. Zahrai, R. Kelley, J. Meier, Y. Zhang, I. Ivic, C. Curtis, R. Palmer, T. - Y. Yu, G. Zhang, R. J. Doviak, P. B. Chilson, M. Xue, and Q. Xu, 2010: A status report on the RF and digital components of the multi-channel receiver development at the National Weather Radar Testbed. Preprints, 26th International Conference on Interactive Information and Processing Systems (IIPS) for Meteorology, Oceanography, and Hydrology, Atlanta, GA, Amer. Meteor. Soc., Paper 14B.3.
- Yu T.-Y., M. B. Orescanin, C. D. Curtis, D. S. Zrnić, and D. E. Forsyth, 2007: Beam multiplexing using the phased-array weather radar. *J. Atmos. Oceanic Technol.*, **24**, 616-626.
- Zhang, G., and R. J. Doviak, 2009: Spaced-antenna interferometry to detect and locate subvolume inhomogeneities of reflectivity: an analogy with monopulse radar. *J. Atmos. Oceanic Technol.*, **25**, 1921-1938.
- Zrnić, D. S., J. F. Kimpel, D. E. Forsyth, A. Shapiro, G. Crain, R. Ferek, J. Heimmer, W. Benner, T. J. McNellis, R. J. Vogt, 2007: Agile beam phased array radar for weather observations. *Bull. Amer. Meteor. Soc.*, **88**, 1753–1766.